
Tsunami Inundation Map Southeast Corpus Christi

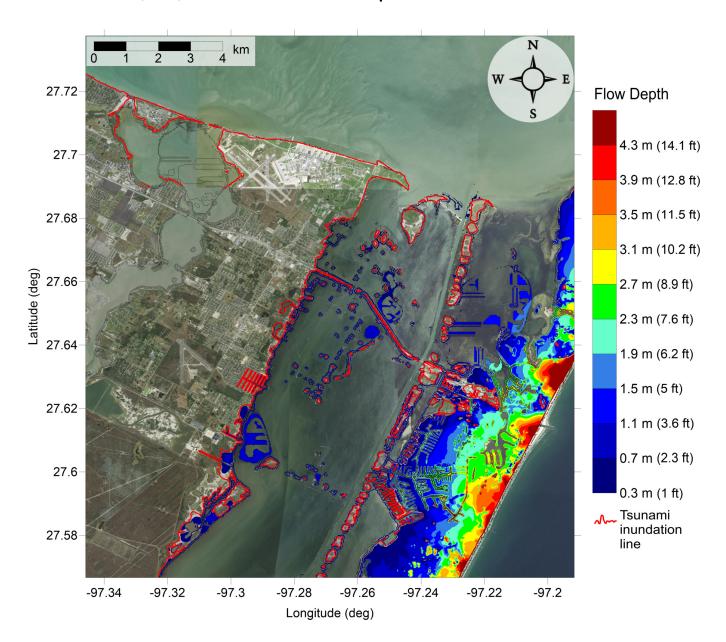

MAXIMUM ESTIMATED TSUNAMI INUNDATION

METHOD OF PREPARATION

Tsunami modeling was performed by the Tsunami Research Group at Texas A&M University at Galveston, funded by NOAA. The tsunami modeling process utilized the 3D model TSUNAMISD (Horrillo et al., 2013) to model landslidegenerated tsunamis, coupled with the 2D model NEOWAVE (Yamazaki et al., 2008) which calculates wave propagation and detailed runup for inundation mapping. T tsunami generation phase (TSUNAMISD) used a 15 arc-second (~450m) resolution grid with bathymetry obtained from the National Oceanic and Atmospheric Administration (NOAA) National Geophysical data Center (NGDC) Coastal Relief Model (CRM) with 3 arc-second (~90m) resolution. The propagation/inundation modeling phase (NEOWAVE) consisted of a series of nested grids from 15 arc-second (~450m) to 1/3 arc-second (~10m) resolution grids were obtained from NOAA NGDC CRM. Near-shore grids with a 3 arc-second (~90m) or higher resolution were obtained from the NOAA NGDC Tsunami Inundation Digital Elevation Models (DEMs) with 1/3 arc-second (~10m) resolution and were adjusted to "Mean High Water" sea level conditions, representing a conservative sea level for the intended use of tsunami modeling and mapping.

The accuracy of the flow depth and inundation line shown on this map is subject to limitations including accuracy of available bathymetry/topography data, tsunami source information, and the current scientific understanding of tsunami generation and propagation as expressed in the models. This map represents the composite maximum inundation from all seven tsunami sources considered here and does not represent inundation from a single tsunami event.

, J., Wood A., Kim, G.-B, A. Parambath A., 2013. A simplified 3-D Stokes numerical model for landslide-tsunami: Application to the Gulfico. J. Geophys. Res. Oceans, 118, 6934-6950.

ten Brink, U., Twichel, D., Lynett, P., Geist. E., Chaytor, J., Lee. H., Buczkowski, B., Flores, C., 2009. Regional Assessment of Tsunami Potential in the Gulf of Mexico. Open-File Report. U.S. Geological Survey.

Yamazaki, Y., Kowalik, Z., Cheung, K.F., 2008. Depth-integrated, non-hydrostatic model for wave breaking and run-up. Int. J. Numer. Meth. Fluids, 61(5), 473-497.

Pampell-Manis, A., Horrillo, J., Shigihara, Y., Parambath, L. Probabilistic Assessment of Landslide Tsunami Hazard for the Northern Gulf of Mexico, J. Geophys. Res. Oceans, under review.

State of Texas - Southeast Corpus Christi



		•
LOCAL LANDSLIDE SOURCES GULF OF MEXICO		LOCATION (Deg)
Geological	East Breaks	Long: -95.68 Lat: 27.70
	Mississippi Canyon	Long: -90.00 Lat: 28.60
	West Florida	Long: -84.75 Lat: 25.95
Probabilistic	PSL-A	Long: -94.30 Lat: 27.98
	PSL-B1	Long: -91.56 Lat: 28.05
	PSL-B2	Long: -91.01 Lat: 26.17
	PSL-C	Long: -87.20 Lat: 28.62







INTENDED USE

This tsunami inundation map was prepared to assist local emergency management in identifying their tsunami hazard. It is intended for local jurisdictional, coastal evacuation planning uses only. This map is not intended for site-specific or land-use purposes or regulations.

This inundation map has been compiled with the best currently available scientific information. The inundation tine represents the maximum considered tsunami runup from a number of maximum credible tsunami sources, thus all of the inundation seen in a particular area will not likely be inundated during a single tsunami event. However, actual conditions during a tsunami may vary, so the accuracy of the inundation shown here cannot be So the accuracy of the inundation shown here cannot be guaranteed. Although an attempt has been made to identified ancient events (ten Brink et al., 2009). A suite of seven tsunami source events was used for tsunami modeling, including three identified ancient events (ten Brink et al., 2009) and pour synthetic probabilistic submarine landslides (PSL-A, PSL-B1, PSL-B2, PSL-C) which represent the maximum credible events that could occur in specific regions in the Gulf of Mexico according to the local bathymetry, seaffoor slope, and sediment information (Pampell-Manis et al., *J. Geophys. Res. Oceans*, under review). The location of these sources is indicated in the adjacent table.

LOCAL LANDSLIDE SOURCES

LOCATION (Deg)

so the accuracy of the inundation shown here cannot be guaranteed. Although an attempt has been made to identify a credible upper bound to inundation at any location along the coastline, it remains possible that actual inundation could be greater in a major tsunami event. This map is intended to portray the worst case scenario and does not provide any further information about the repretation of this tsunami injundation map by qualified individuals is of this tsunami inundation map by qualified individuals is strongly recommended.

MAP BASE

Topographic base map obtained from the ArcGIS World Imagery database, exported with a resolution of approximately 1/3 arc-seconds ($\sim 10 \mathrm{m}$). Tsunami inundation line boundaries may reflect updated digital topographic data that can differ significantly from contours shown on the base map.

DISCLAIMER

The National Tsunami Hazard Mitigation Program (NTHMP) and Texas A&M University at Galveston (TAMUG) make no representation or warranties, express or implied, regarding the accuracy of this inundation map nor the data from which the map was derived. Neither the NTHMP nor TAMUG shall be liable under any circumstances for any direct, indirect, special, incidental or consequential damages with respect to any claim by any user or any third party on account of or arising from the use of this map.